

# INSTALL INSTRUCTIONS

READ PRIOR TO ATTEMPTING INSTALLATION

**INSTALLATION SHOULD BE CARRIED OUT BY YOUR LOCAL ELECTRICIAN.**

MODEL	INPUT RATING
400770 Halo 31 inch Natural White	120 VOLTS, 0.22 AMPS, 25 WATTS, 60 HERTZ
400857 Halo 31 inch Warm White	120 VOLTS, 0.22 AMPS, 25 WATTS, 60 HERTZ
400858 Halo 40 inch Natural White	120 VOLTS, 0.33 AMPS, 35 WATTS, 60 HERTZ
400859 Halo 40 inch Warm White	120 VOLTS, 0.33 AMPS, 35 WATTS, 60 HERTZ

## DANGER- RISK OF SHOCK

**DISCONNECT POWER BEFORE INSTALLATION**

**REPLACE REMOVABLE PARTS AFTER SERVICING**

**MODEL 400770 20-40 VOLTS, DC, 0.7 AMP**

**MODEL 400857 20-40 VOLTS, DC, 0.7 AMP**

**MODEL 400858 20-40 VOLTS, DC, 1 AMP**

**MODEL 400859 20-40 VOLTS, DC, 1 AMP**

**SUITABLE FOR DAMP LOCATIONS**

**THIS LUMINAIRE MUST BE MOUNTED OR SUPPORTED INDEPENDENTLY OF AN OUTLET BOX**

## PLEASE READ: Important Information Before Installation

1. IMPORTANT- Risk of fire or electric shock.
2. IMPORTANT- To prevent wiring damage or abrasion, do not pinch or damage exposed wiring during installation.
3. IMPORTANT- Do not alter, relocate, or remove wiring, lampholders, power supply, or any other electrical component.
4. Verify power is off before installing or un-installing, or servicing.
5. Do not install product if it is damaged.
6. Please retain these instructions for maintenance reference.


## WIRING INSTALLATION

1. Turn off power to the luminaire at switch and circuit breaker.
2. Remove the attachment plate on the control unit.
3. Attach the supply wire to the enclosure plate.
4. Connect the conductors black to black, white to white, and ground to ground.
5. Feed wires back into fixture and reattach the enclosure plate to the top of the luminaire.

## ENCLOSURE PLATE OPENING

Enclosure plate rated to fit 3/8" (metric 12) and 1/2" fittings (metric 16).


ENCLOSURE PLATE OPENING

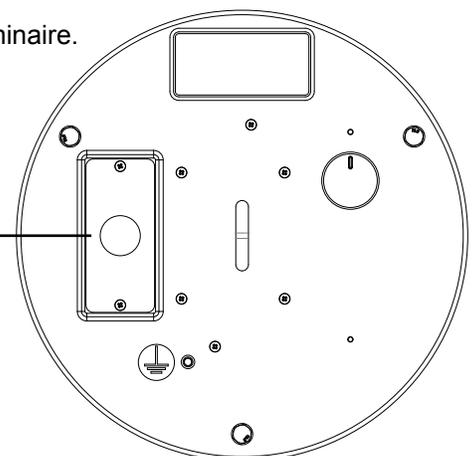


**vari**®

VARI Halo Lights  
VariDesk, LLC, 450 N. Freeport Parkway, Coppell, TX 75019  
Phone: (800)-207-2587  
For product support, reach out to us at [www.vari.com](http://www.vari.com).


STEP 1: Using a screwdriver, remove wiring enclosure plate.

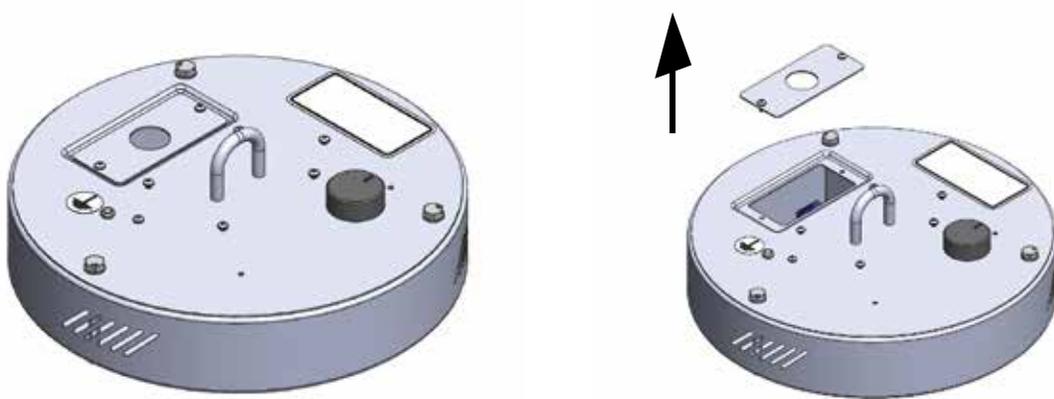

STEP 2: Attach raceway (flex metal conduit) and fittings to enclosure plate.

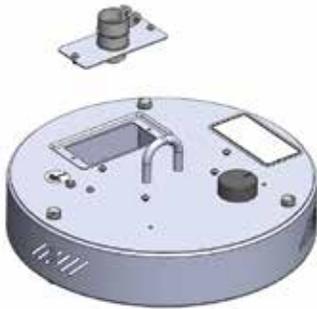

STEP 3: Connect the supply conductors in a manner compliant with your local electrical code. Shown here with wirenuts.

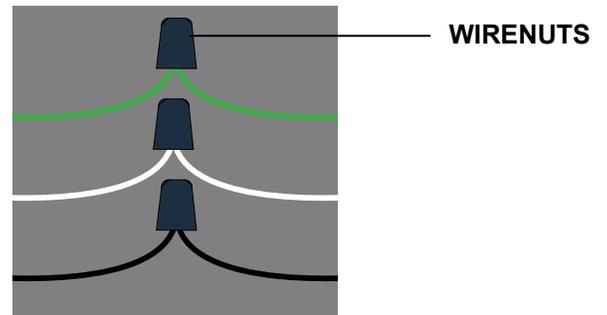

STEP 4: Reattach enclosure plate.

